



SAFETY CAPACITY DATA FOR THICKNESS

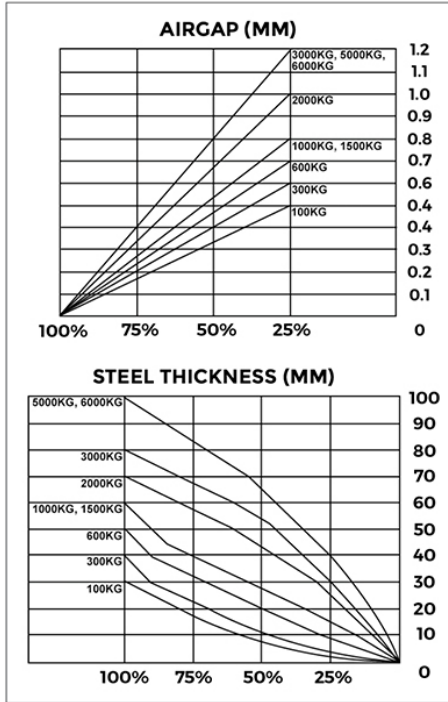

RATED LIFTING STRENGTH (%)	PLATE THICKNESS (mm)								
	100	90	80	70	60	50	40	30	20
100kg	100%	100%	100%	100%	100%	100%	100%	100%	80%
300kg	100%	100%	100%	100%	100%	100%	100%	90%	70%
600kg	100%	100%	100%	100%	100%	100%	90%	70%	50%
1000kg	100%	100%	100%	100%	100%	90%	75%	55%	35%
1500kg	100%	100%	100%	100%	100%	90%	75%	55%	35%
2000kg	100%	100%	100%	100%	80%	60%	45%	30%	20%
3000kg	100%	100%	100%	80%	60%	45%	35%	25%	-
5000kg	100%	85%	70%	55%	45%	35%	25%	-	-
6000kg	100%	85%	70%	55%	45%	35%	25%	-	-

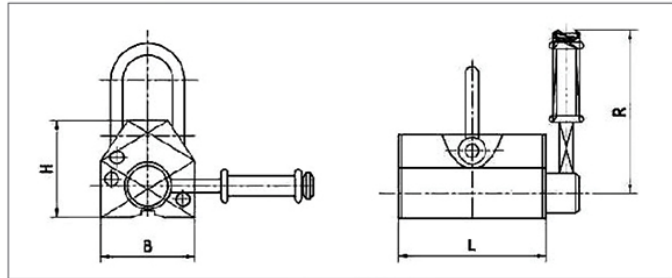

RATED LIFTING STRENGTH (kgf)	CODE	VERTICAL / CYLINDRICAL LIFTING STRENGTH (Kgf)	MAX. PULL-OFF STRENGTH (kgf)	DIMENSIONS (mm)				OPERATION TEMPERATURE (°C)	NET WEIGHT (kg)
				L	B	H	R		
100	144101	30	300	92	64	70	142	<80°C	3
300	144103	100	900	165	88	96	176	<80°C	10
600	144106	200	1800	216	118	120	219	<80°C	20
1000	144110	300	3000	264	148	140	266	<80°C	37
1500	144115	500	4500	308	172	168	285	<80°C	50
2000	144200	600	6000	397	172	168	380	<80°C	70
3000	144300	-	9000	443	226	217	512	<80°C	100
5000	144500	-	15000	582	290	265	627	<80°C	299
6000	144600	-	18000	713	290	265	707	<80°C	320