


DIN ISO Chain No	Pitch	d1 max	b1 min	H max	d2 max	b2 max	Min. T.S	A.T.S	Weight
	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
CA550	41.4	16.66	19.81	19.30	7.19	35.00	39.10	51.20	1.94
CA557	41.40	17.78	20.24	23.10	7.92	37.10	55.60	66.72	2.623



Chain	Pitch	d1	b1	h	d2	b2	U.T.S KN	A.T.S KN	KG/ft
S32	29.21	11.43	15.88	13.4	4.45	26.7	8	9.6	0.28
S52	38.1	15.24	22.23	17.2	5.74	36.9	17.8	21.36	0.55
S55	41.4	17.78	22.23	17.2	5.74	36.9	17.8	21.36	0.57
S62	41.91	19.05	25.4	17.2	5.74	40	26.7	32.04	0.66

## Detachable chain

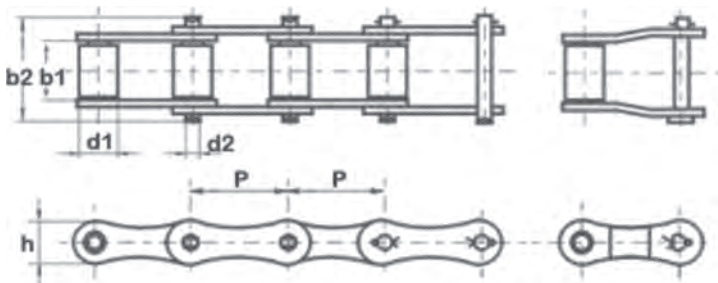

Chain No	Pitch	D	(mm)			Tensile strength (KN)	Weight per meter (kg/m)
			F	M	T		
S25 DET	22.96	10.72	4.572	17.8	1.854	3.382	0.30
S32 DET	29.39	15.09	5.842	23.8	2.286	5.874	0.48
S51 DET	28.78	17.86	5.893	27.8	2.540	7.496	0.60
S52 DET	38.30	21.44	7.696	35.7	2.048	9.612	0.983
S55 DET	41.40	20.22	8.128	32.5	3.175	9.968	0.924
S62 DET	42.01	24.99	8.51	39.7	3.76	15.56	1.35