




**Ball Bearing Inserts**

**SA, SA-F, NA**  
Cylindrical bore  
(with eccentric locking collar)  
d (30) ~ 60 mm

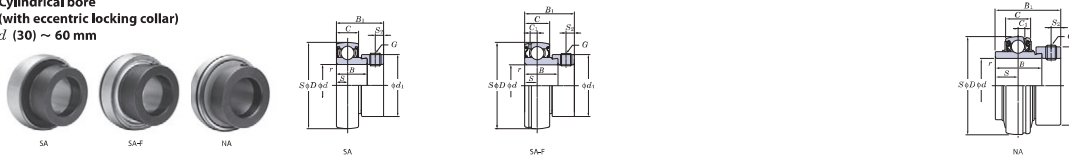

Shaft Dia mm inch	Dimensions										Basic Load Ratings			Factor f <sub>s</sub>	Bearing No.	Dimensions						Set Screw Brg. Bore		Mass kg		
	d	D		B		B <sub>1</sub>		C		r (min.)		C <sub>1</sub>	C <sub>0</sub>			S	S <sub>2</sub>	d <sub>1</sub>	mm	inch	mm	inch				
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch												mm		inch	mm
—	1 1/8	72	2.835	23	0.906	36.5	1.437	17	0.669	1.1	0.043	25.7	15.4	13.9	—	—	8.5	0.335	6.8	0.268	55.6	2.189	—	1/2-24UNF	0.5	
		72	2.835	25.4	1.000	38.9	1.531	19	0.748	1.1	0.043	25.7	15.4	13.9	SA207-22	5.7	0.224	9.5	0.335	6.8	0.268	55.6	2.189	—	1/2-24UNF	0.57
		72	2.835	37.6	1.480	51.1	2.012	20	0.787	1.1	0.043	25.7	15.4	13.9	NA207-22	5.5	0.217	18.8	0.740	6.8	0.268	55.6	2.189	—	1/2-24UNF	0.61