



## UC200 Series

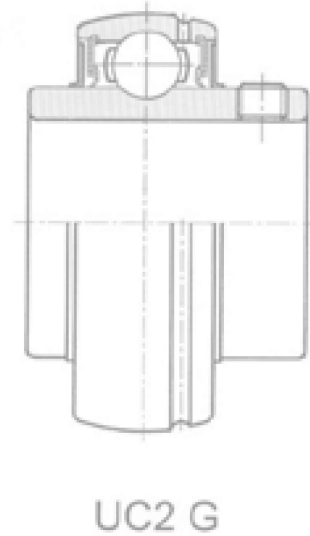

Part No.	Basic Dimensions (mm / inch)								Basic Loads (KN)		N.W. (kg)
	d	D	B	C	S	S1	G	h	Cr	Cor	
UC201	12	47	31	16	12.7	18.3	5	4	11	5.7	0.21
UC201-8	0.5	1.853	1.221	0.53	0.5	0.721	0.197	0.158	11	5.7	0.21
UC202	15	47	31	16	12.7	18.3	5	4	11	5.7	0.19
UC202-10	0.625	1.853	1.221	0.53	0.5	0.721	0.197	0.158	11	5.7	0.42
UC203	17	47	31	16	12.7	18.3	5	4	11	5.7	0.17
UC204	20	47	31	16	12.7	18.3	5	4	11	5.7	0.16
UC204-12	0.75	1.85	1.221	0.63	0.5	0.721	0.197	0.158	11	5.7	0.35
UC205	25	52	34.1	17	14.3	19.8	5.5	4.2	12	6.7	0.21
UC205-14	0.875	2.047	1.343	0.669	0.563	0.78	0.217	0.165	12	6.7	0.47
UC205-16	1	2.047	1.343	0.669	0.563	0.78	0.217	0.165	12	6.7	0.47
UC206	30	62	38.1	19	15.9	22.2	6	4.8	16.7	9.6	0.33
UC206-18	1.125	2.441	1.5	0.748	0.626	0.874	0.236	0.189	16.7	9.6	0.7
UC206-19	1.188	2.441	1.5	0.748	0.626	0.874	0.236	0.189	16.7	9.6	0.7
UC206-20	1.25	2.441	1.5	0.748	0.626	0.874	0.236	0.189	16.7	9.6	0.7
UC207	35	72	42.9	20	17.5	25.4	6.5	5.4	22	13.1	0.47
UC207-20	1.25	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-22	1.375	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-23	1.438	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC208	40	80	49.2	21	19	30.2	8	5.9	28	17	0.64
UC208-24	1.5	3.15	1.937	0.827	0.748	1.189	0.315	0.232	28	17	1.41
UC209	45	85	49.2	22	19	30.2	8	6.1	28.1	17.5	0.67
UC209-26	1.625	3.346	1.937	0.866	0.748	1.189	0.315	0.24	28.1	17.5	1.5
UC209-28	1.75	3.346	1.937	0.866	0.748	1.189	0.315	0.24	28.1	17.5	1.5
UC210	50	90	51.6	24	19	32.6	9	6.5	30.1	19.9	0.81
UC210-30	1.875	3.543	2.032	0.945	0.748	1.284	0.354	0.256	30.1	19.9	1.78
UC210-31	1.833	3.543	2.032	0.945	0.748	1.284	0.354	0.256	30.1	19.9	1.78
UC210-32	2	3.937	2.189	0.984	0.874	1.315	0.354	0.28	37.2	25.1	2.47

NB. Finer Power Transmissions P/L is transitioning into NBR Bearings. Unless NBR Bearings are specifically requested, any remaining PFB/TNC stock will be supplied.

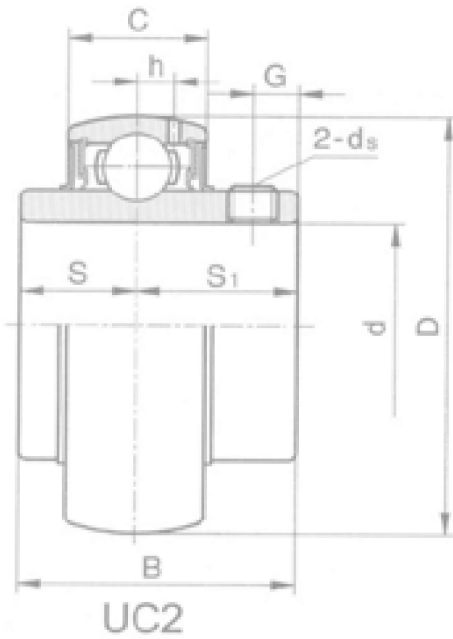

# UC200 Series

Part No.	Basic Dimensions (mm / inch)								Basic Loads (KN)		N.W. (kg)
	d	D	B	C	S	S1	G	h	Cr	Cor	
UC211	55	100	55.6	25	22.2	33.4	9	7.1	37.2	25.1	1.12
UC211-32	2	3.937	2.189	0.984	0.874	1.315	0.354	0.28	37.2	25.1	2.47
UC212	60	110	65.1	27	25.4	39.7	10.5	7.6	41	28.3	1.53
UC212-36	2.25	4.331	2.563	1.063	1	1.563	0.413	0.299	41	28.3	3.37
UC212-38	2.375	4.331	2.563	1.063	1	1.563	0.413	0.299	41	28.3	3.37
UC213	65	120	65.1	28	25.4	39.7	12	8.5	49.2	34.4	1.86
UC213-40	2.25	4.724	2.563	1.102	1	1.563	0.472	0.335	49.2	34.4	4.1
UC214	70	125	74.6	30	30.2	44.4	12	8.9	53.5	37.8	2.05
UC214-44	2.75	4.921	2.937	1.181	1.189	1.748	0.472	0.35	53.5	37.8	4.52
UC215	75	130	77.8	32	33.3	44.5	12	9	56.8	42.6	2.21
UC215-48	3	5.118	3.063	1.26	1.311	1.752	0.472	0.354	56.8	42.6	4.87
UC216	80	140	82.6	33	33.3	49.3	14	9	62.4	45.6	2.79
UC216-50	3.125	5.512	3.252	1.299	1.311	1.941	0.551	0.354	59.9	46.4	6.14
UC217	85	150	85.7	35	34.1	51.6	14	10	71.8	55	3.38
UC217-52	3.25	5.906	3.374	1.378	1.343	2.032	0.551	0.394	71.8	55	7.44
UC218	90	160	96	37	39.7	56.3	15	10.5	82.6	61.5	4.45
UC218-56	3.5	6.299	3.78	1.457	1.563	2.216	0.591	0.413	82.6	61.5	9.8

NB. Finer Power Transmissions P/L is transitioning into NBR Bearings. Unless NBR Bearings are specifically requested, any remaining PFB/TNC stock will be supplied.

# UC200 Triple Lip Series

Part No.	Basic Dimensions (mm / inch)								Basic Loads (KN)		N.W. (kg)
	d	D	B	C	S	S1	G	h	Cr	Cor	
UC204TRL	20	47	31	16	12.7	18.3	5	4	10.8	5.5	0.16
UC204-12TRL	0.75	1.85	1.221	0.63	0.5	0.721	0.197	0.158	11	5.7	0.35
UC205TRL	25	52	34	17	14.3	19.8	5.5	4.2	11.8	6.6	0.21
UC205-16TRL	1	2.047	1.343	0.669	0.563	0.78	0.217	0.165	12	6.7	0.47
UC206TRL	30	62	38	19	15.9	22.2	6	4.8	16.3	9.4	0.32
UC206-20TRL	1.25	2.441	1.5	0.748	0.626	0.874	0.236	0.189	16.7	9.6	0.7
UC207TRL	35	72	43	20	17.5	25.4	6.5	5.4	21.5	12.8	0.47
UC207-20TRL	1.25	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-22TRL	1.375	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-23TRL	1.438	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC208TRL	40	80	49	21	19	30.2	8	5.9	27.4	16.6	0.64
UC208-24TRL	1.5	3.15	1.937	0.827	0.748	1.189	0.315	0.232	28	17	1.41
UC209TRL	45	85	49	22	19	30.2	8	6.1	27.5	17.1	0.68
UC209-28TRL	1.75	3.346	1.937	0.866	0.748	1.189	0.315	0.24	28.1	17.5	1.5
UC210TRL	50	90	52	24	19	32.6	9	6.5	29.4	19.4	0.81
UC210-30TRL	1.875	3.543	2.032	0.945	0.748	1.284	0.354	0.256	30.1	19.9	1.78
UC211TRL	55	100	56	25	22.2	33.4	9	7.1	36.4	24.5	1.12
UC211-32TRL	2	3.937	2.189	0.984	0.874	1.315	0.354	0.28	37.2	25.1	2.47
UC212TRL	60	110	65.1	27	25.4	39.7	10.5	7.6	41	28.3	1.53
UC213TRL	65	120	65.1	28	25.4	39.7	12	8.5	49.2	34.4	1.86
UC213-40TRL	2.25	4.724	2.563	1.102	1	1.563	0.472	0.335	49.2	34.4	4.1

NB. Finer Power Transmissions P/L is transitioning into NBR Bearings. Unless NBR Bearings are specifically requested, any remaining PFB/TNC stock will be supplied.