


# Spherical Plain Bearings with Fitting Crack



SDTZ Spherical Plain Bearings are manufactured with a single split in the outer ring in the axial direction. Both the inner and outer are phosphate treated. Sliding surfaces are steel.

The ES type contains lubrication grooves and holes in the outer and inner rings.

The 2RS type is fitted with seal rings on each side.

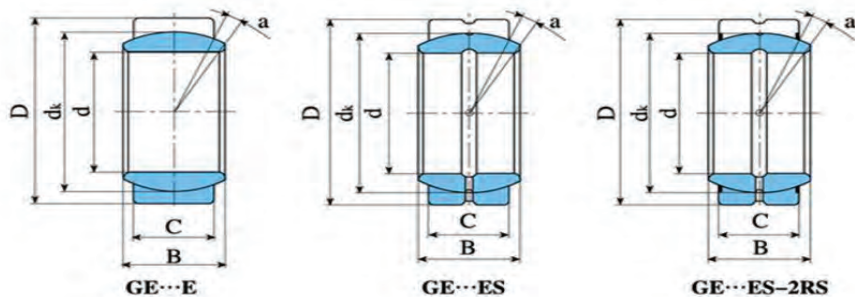

## GE Series

Bearing number		Dimensions (mm)						Load ratings(KN)		Weight (kg)
		d	D	B	C	dk	a° ≈	Dynamic	Static	
GE8E	-	8	16	8	5	13	15	5.5	27	0.008
GE10E	-	10	19	9	6	16	12	8.1	40	0.011
GE12E	-	12	22	10	7	18	10	10	53	0.015
GE15ES	GE15ES-2RS	15	26	12	9	22	8	16	84	0.027
GE17ES	GE17ES-2RS	17	30	14	10	25	10	21	106	0.044
GE20ES	GE20ES-2RS	20	35	16	12	29	9	30	146	0.066
GE25ES	GE25ES-2RS	25	42	20	16	35.5	7	48	240	0.119
GE30ES	GE30ES-2RS	30	47	22	18	40.7	6	62	310	0.153
GE35ES	GE35ES-2RS	35	55	25	20	47	6	79	399	0.233
GE40ES	GE40ES-2RS	40	62	28	22	53	7	99	495	0.306
GE45ES	GE45ES-2RS	45	68	32	25	60	7	127	637	0.427
GE50ES	GE50ES-2RS	50	75	35	28	66	6	156	780	0.546
GE60ES	GE60ES-2RS	60	90	44	36	80	6	245	1220	1.04
GE70ES	GE70ES-2RS	70	105	49	40	92	6	313	1560	1.55
GE80ES	GE80ES-2RS	80	120	55	45	105	6	400	2000	2.31
GE90ES	GE90ES-2RS	90	130	60	50	115	5	488	2440	2.75
GE100ES	GE100ES-2RS	100	150	70	55	130	7	607	3030	4.45
GE110ES	GE110ES-2RS	110	160	70	55	140	6	654	3270	4.82
GE120ES	GE120ES-2RS	120	180	85	70	160	6	950	4750	8.05
GE140ES	GE140ES-2RS	140	210	90	70	180	7	1070	5350	11.02